


GLIDETECH[®] BUTYL

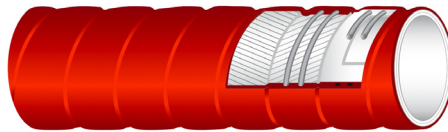

Premium grade low permeation extra flexible suction and delivery hose suitable for wine and spirits. Phthalates free.

DESCRIPTION

Tube

IIR, white. Meets FDA 21 CFR 177.2600, DM 21.03.73 E SEGUENTI AND JAPAN-MINISTRY OF HEALTH AND WELFARE NOTICE NO.370,1959 AND NO.201, 2006.

Reinforcement Cover

synthetic plies, steel wire helices
wide corrugated, red, low friction material, non-marking when dragged on the floor, oil, chemical and abrasion resistant, easy to clean.

Sterilization Marking

according to 3A Sanitary Standard Class II
TUDERTECHNICA GLIDETECH[®] BUTYL



TECHNICAL CHARACTERISTICS

Temperature range

-40°F/248°F (-40°C / +120°C)

Vacuum

30.0 Inch HG (0.8 bar)

Norm

ISO 1307 for dimensional tolerances
3A Sanitary Standard Class II

Inside diameter		Outside diameter	Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[in]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
19	.75	1.22	10	150	30	450	0,69	.46	60	2.36
25	1	1.46	10	150	30	450	0,85	.57	70	2.76
38	1.5	2.00	10	150	30	450	1,12	.75	80	3.15
51	2	2.52	10	150	30	450	1,47	.99	100	3.94
63,5	2.5	3.09	10	150	30	450	1,99	1.34	130	5.12
76	3	3.62	10	150	30	450	2,49	1.68	150	5.91
102	4	4.65	10	150	30	450	3,76	2.54	250	9.80

Other diameters, wall thickness, cover colors and pressure only on specific request.



tuderhose@crpindustries.com
www.crp tudertechnica.com

35 Commerce Drive
Cranbury, NJ 08512
Tel. (800)526-4066