


GLIDETECH® VINEYARD

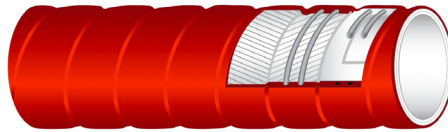

Extra flexible suction and delivery hose suitable for wine and vinification by-products.
Phthalates free.

DESCRIPTION

Tube

NR, white. Meets FDA 21 CFR 177.2600, BFR RECOMMENDATION XXI CAT 2, DM 21.03.73 E SEGUENTI AND JAPAN-MINISTRY OF HEALTH AND WELFARE NOTICE NO.370,1959 AND NO.201, 2006. RAL REGISTRATION G-72.

Reinforcement Cover

synthetic plies, steel wire helices
wide corrugated, red, low friction material, non marking when dragged on the floor, oil, chemical and abrasion resistant, easy to clean.

Sterilization Marking

according to 3A Sanitary Standard Class II
TUDERTECHNICA GLIDETECH® VINEYARD

TUDERTECHNICA # GLIDETECH VINEYARD

TECHNICAL CHARACTERISTICS

Temperature range

-40°F/176°F (-40°C / +80°C)

Vacuum

30.0 Inch HG (0.8 bar)

Norm

ISO 1307 for dimensional tolerances
3A Sanitary Standard Class II

| Inside diameter | | Outside diameter | Working pressure | | Burst pressure | | Appr. weight | | Bending radius | |
|-----------------|------|------------------|------------------|-------|----------------|-------|--------------|----------|----------------|------|
| [mm] | [in] | [in] | [bar] | [psi] | [bar] | [psi] | [kg/mt] | [lbs/ft] | [mm] | [in] |
| 19 | .75 | 1.22 | 10 | 150 | 30 | 450 | 0,72 | .49 | 60 | 2.36 |
| 25 | 1 | 1.46 | 10 | 150 | 30 | 450 | 0,83 | .56 | 70 | 2.76 |
| 38 | 1.5 | 2.00 | 10 | 150 | 30 | 450 | 1,28 | .87 | 80 | 3.15 |
| 51 | 2 | 2.52 | 10 | 150 | 30 | 450 | 1,62 | 1.10 | 100 | 3.94 |
| 63,5 | 2.5 | 3.09 | 10 | 150 | 30 | 450 | 2,23 | 1.52 | 130 | 5.12 |
| 76 | 3 | 3.62 | 10 | 150 | 30 | 450 | 2,83 | 1.92 | 150 | 5.91 |
| 102 | 4 | 4.65 | 10 | 150 | 30 | 450 | 3,76 | 2.56 | 250 | 9.80 |

Other diameters, wall thickness, cover colours and pressure only on specific request.



tuderhose@crpindustries.com
www.crp tudertechnica.com

35 Commerce Drive
Cranbury, NJ 08512
Tel. (800)526-4066